


Technical Datasheet No : 139_(v2)

Part Number 700-008

Bridge 375-25

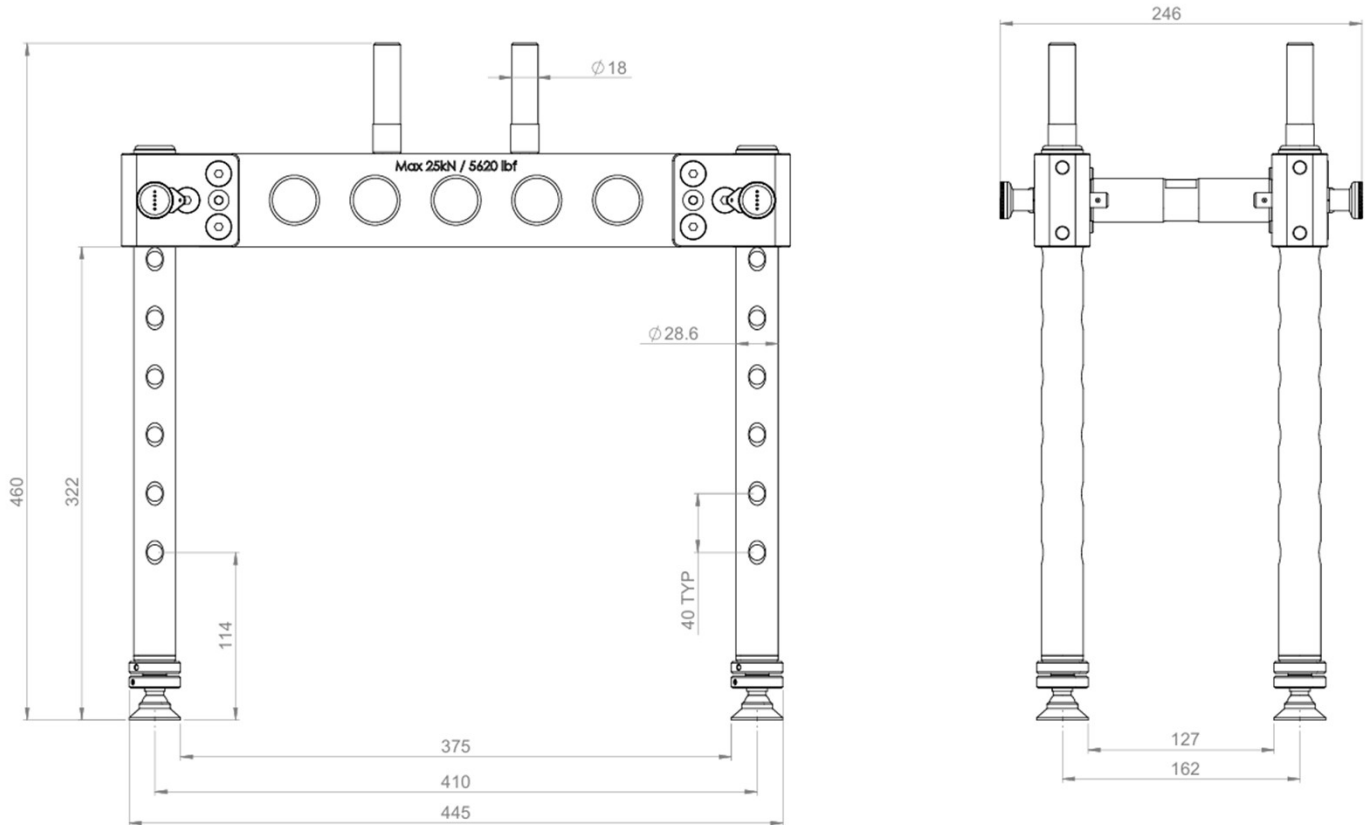

Application – For use with the t25 or t60 tester. Used when testing requires a larger span or height increase. The bridge height can be adjusted with the legs and the feet. Foot Adjustment +20mm. Total height to underside of the bridge 322 mm. **WARNING** MAX load 25kN (5,620 lbf)

Kit Content - 375 Bridge, 2 x Spacer Bars (Wide) 4 x legs, 4 x Bridge Upstand, Kit Bag & Internal Roll Bag

Accessories (NOT INCLUDED) – 2 x Spacer Bar (Narrow) PN 700-021, Drop Rod 500mm & Thrust Nut - PN 700-030, 24mm Reversible Ratchet Ring Spanner - Part No. 601-037

Specification

Weight	5.4 kg / 11.9lbs
Material	Aluminium / Steel
Finish	Anodised / Zinc Plated